


CABAIL KINKET



OPRAWY LED

CZ: LED svítidlo/ SK: LED svietidlo/ EN: LED lamp

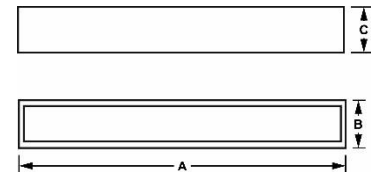

SAMSUNG
LED

INDEX	ABC						A [mm]	B [mm]	C [mm]	
013874	Cabail LED	24 W	2400 lm	100 lm/W	4000 K	Czarny	600	65	79	5902808807414
013873	Cabail LED	40 W	4000 lm	100 lm/W	4000 K	Černá Čierny Black	1200	65	79	5902808807421

AC 230V	SMD LED	70°	IP	PF
≥80	40000 h	20	0,9	

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Brolux

www.bowi.com.pl